




WR-320-DXW

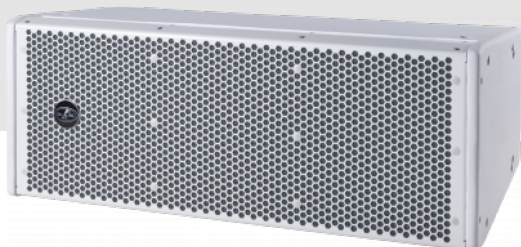

DESCRIPTION

The WR-320-DXW has been designed for the outdoor installation market. The birch plywood cabinet construction offers a compact design which is available in white.

The DX finish protects the cabinets from the elements thanks to a fiberglass exterior augmenting their weather resistance when used in direct exposure situations.

KEY FEATURES

- Installation Line Array
- 2 x 10MI low frequency loudspeakers, 2.5" VCD
- 1 x DAS M-75 compression driver
- DX finish (direct exposure rating)
- Rigging systems for permanent installation
- Rigging compatible with the WR-322S-DX

APPLICATIONS

- Professional installation systems
- Houses of worship
- Auditoriums/Theaters
- Theme parks
- Outdoor Applications

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	60 Hz - 18 kHz
Horizontal Coverage (-6 dB)	90°
Vertical Coverage	Splay Dependent
Nominal Impedance	16 ohms
RMS Power Handling	500 W
Peak Power Handling	2000 W
On-axis Sensitivity 1W/1 m	99 dB SPL
Maximum Peak SPL at 1 m	132 dB
Recommended Amplifier	DX-80-230 DX-80-115
Recommended Processor	DSP-2040

Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	Attachable Rigging System
Finish	Fiberglass
Color	White
Dimensions (H x W x D)	270 x 700 x 365 mm 10,6 x 27,6 x 14,4 in



Components

LF Driver	10MI
HF Driver	M-75N
Horn/Waveguide	BPS-90AR

ORDERING INFORMATION

Performance

Model	Description	P/N
-------	-------------	-----

System

WR-320-DXW	2-way Passive Line Array	10428243
------------	--------------------------	----------

Replacement Parts

10MI	Cone Transducer	20208690
BPS-90AR	Horn	20301050
F-AR320	Filter	30006507
GM-10MI	Recone Kit	20208421
M-75N	Compression Driver	10208030

Accessories

ANL-2	Rigging Accessories	10101020
AX-WR300-W	Rigging Accessories	10102976
JP-WR320-W	Rigging Accessories	10102978

DIMENSIONS

